

TOMEI Camshaft Spec Card

PART NAME **PROCAM** ENGINE **4G63 EVO 1-8 SOLID**

PART NUMBER IN 1-3 : 1459280115 4-8 : 1456280115 EX 1-3 : 1460280115 4-6 : 1457280115 7-8 : 1458280115

GRIND	IN	280° / 11.50mm	-	BACE	IN	Φ 30.0	ROCKER ARM RATIO*	-	VALVE CLEARANCE	IN	0.12
	EX	280° / 11.50mm	-		CIRCLE(Φ)	EX				Φ 30.0	WHEN COLD

LIFT	IN	@CAM 6.75mm	@VALVE 11.50mm	LOBE	IN	110.0
	EX	@CAM 6.75mm	@VALVE 11.50mm		CENTER(°)	EX

* ALL LIFTS ARE BASED ON ZERO LASH AND THORETICAL ROCKER ARM RATIOS

CAM TIMING		OPENS(°)	CLOSES(°)	Actual Duration @ Opening(°)
Actual Duration	IN	BTDC 26.0	ABDC 74.0	280.0
	EX	BBDC 79.0	ATDC 21.0	280.0
Valve Lift				





Values shown are, from start to the end of actual duration. (Excluding the ramp values)

CAM TIMING		OPENS(°)	CLOSES(°)	TOTAL DURATION(°)
at 1mm	IN	BTDC 7.5	ABDC 44.5	232.0
	EX	BBDC 51.5	ATDC 1.5	233.0
Valve Lift				

Values are of actual duration from start to end of 1mm value points. (Excluding ramp values)

CAM TIMING		OPENS(°)	CLOSES(°)	TOTAL DURATION(°)
at 0.05"	IN	BTDC 4.5	ABDC 41.0	225.5
	EX	BBDC 48.5	TDC	228.5
Valve Lift				

Values are of actual duration from start to end of 0.05" value points. (Excluding ramp values)

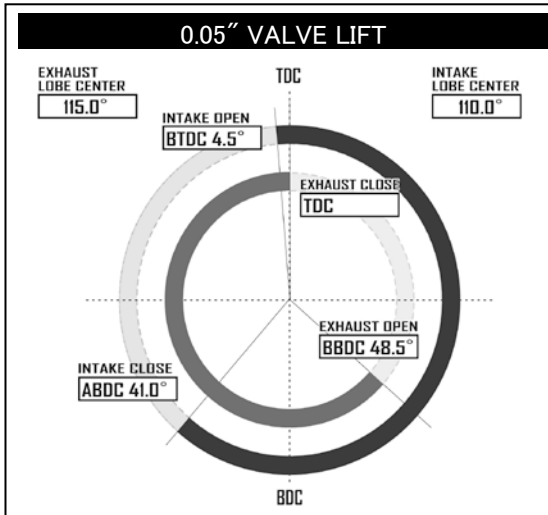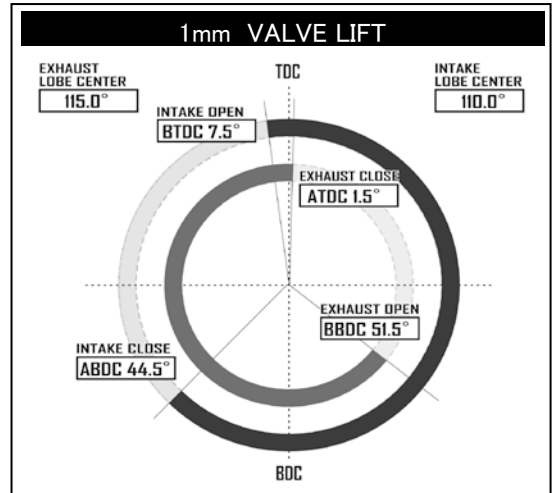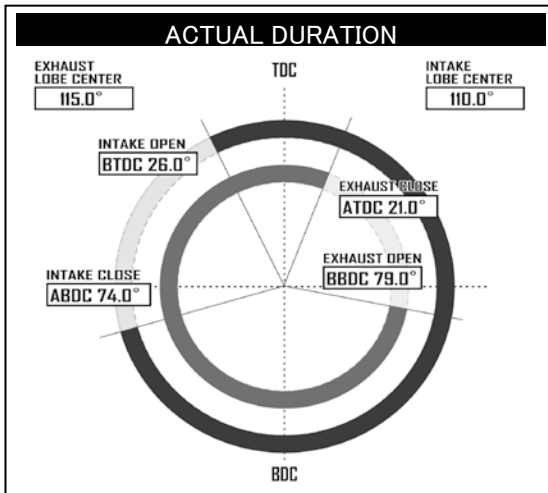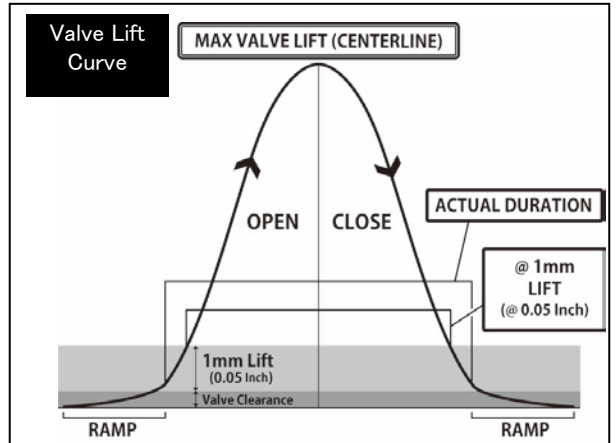

REQUIRED VALVE SPRING SPEC	
NOMAL HEIGHT	50.8mm
SET LENGTH	39.6mm
LIFT LENGTH	28.1mm
COMPRESSED HEIGHT	27.1mm
SET LOAD	33.6kgf ± 5%
LIFT LOAD	81.7kgf ± 6%
TOMEI PART NUMBER	163034

REQUIRED PARTS	
PRODUCT NAME	TOMEI PART NUMBER
SOLID PIVOT	163039