

TOMEI Camshaft Spec Card

PART NAME **PROCAM** ENGINE **L6**

PART NUMBER **1471320093**

GRIND **320° / 9.30mm SOLID** BACE **Φ 28.8** ROCKER ARM RATIO* **1.5** VALVE CLEARANCE IN **0.20**
 CIRCLE(Φ) VALVE CLEARANCE WHEN COLD EX **0.25**

LIFT **@CAM 9.30mm @VALVE 13.50mm** LOBE CENTER(°) **105.0**

* ALL LIFTS ARE BASED ON ZERO LASH AND THORETICAL ROCKER ARM RATIOS

CAM TIMING		OPENS(°)	CLOSES(°)	Actual Duration @ Opening(°)
Actual Duration	IN	BTDC 55.0	ABDC 85.0	320.0
Valve Lift	EX	BBDC 85.0	ATDC 55.0	320.0





Values shown are, from start to the end of actual duration. (Excluding the ramp values)

CAM TIMING		OPENS(°)	CLOSES(°)	TOTAL DURATION(°)
at 1mm	IN	BTDC 35.0	ABDC 65.0	280.0
Valve Lift	EX	BBDC 65.0	ATDC 35.0	280.0

Values are of actual duration from start to end of 1mm value points. (Excluding ramp values)

CAM TIMING		OPENS(°)	CLOSES(°)	TOTAL DURATION(°)
at 0.05"	IN	BTDC 33.0	ABDC 63.0	276.0
Valve Lift	EX	BBDC 63.0	ATDC 33.0	276.0

Values are of actual duration from start to end of 0.05" value points. (Excluding ramp values)

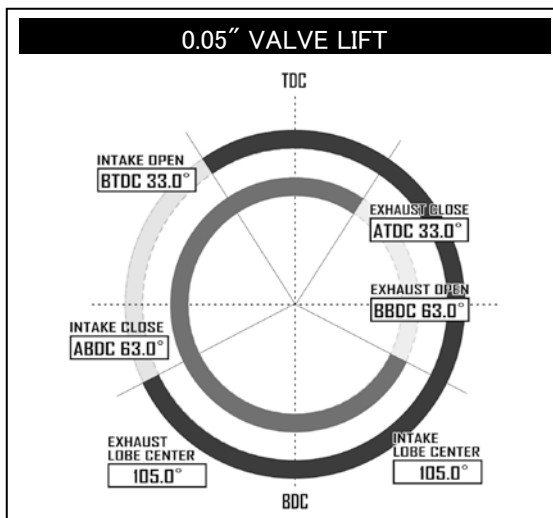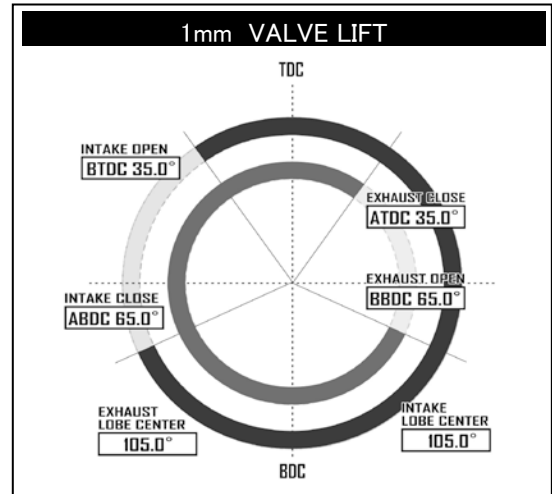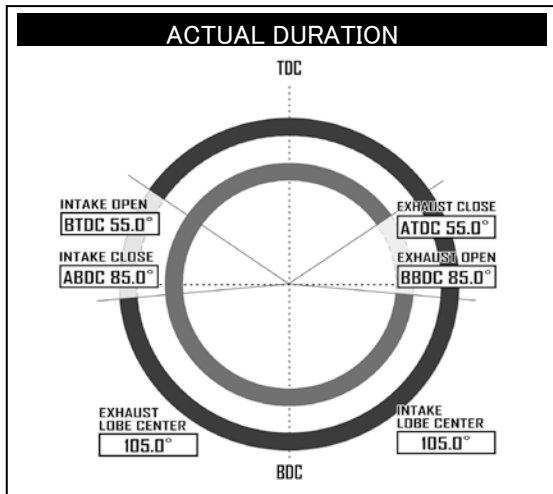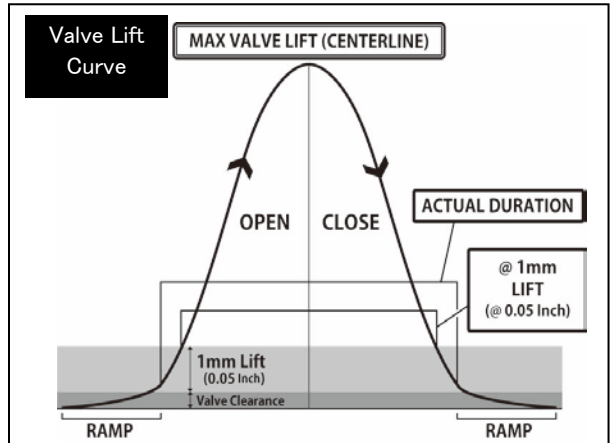

REQUIRED VALVE SPRING SPEC	
NOMAL HEIGHT	
SET LENGTH	
LIFT LENGTH	
COMPRESSED HEIGHT	
SET LOAD	
LIFT LOAD	
TOMEI PART NUMBER	

REQUIRED PARTS	
PRODUCT NAME	TOMEI PART NUMBER