

TOMEI Camshaft Spec Card

PART NAME	PROCAM			ENGINE	RB20DE(T)		
-----------	--------	--	--	--------	-----------	--	--

PART NUMBER	SET	-	IN	1411260088	EX	1412260088
-------------	-----	---	----	------------	----	------------

GRIND	IN	260° / 8.80mm	LASH	BACE	IN	Φ32.0	ROCKER ARM RATIO*	VALVE CLEARANCE IN	-
	EX	260° / 8.80mm	LASH		CIRCLE(Φ)	EX			Φ32.0

LIFT	IN	@CAM 8.80mm	@VALVE 8.80mm	LOBE	IN	115.0
	EX	@CAM 8.80mm	@VALVE 8.80mm		CENTER(°)	EX

* ALL LIFTS ARE BASED ON ZERO LASH AND THORETICAL ROCKER ARM RATIOS

CAM TIMING		OPENS(°)		CLOSES(°)		Actual Duration @ Opening(°)
Actual Duration	IN	BTDC	13.0	ABDC	67.0	260.0
Valve Lift	EX	BBDC	67.0	ATDC	13.0	260.0





Values shown are, from start to the end of actual duration. (Excluding the ramp values)

CAM TIMING		OPENS(°)		CLOSES(°)		TOTAL DURATION(°)
at 1mm	IN	ATDC	5.0	ABDC	49.0	224.0
Valve Lift	EX	BBDC	49.0	BTDC	5.0	224.0

Values are of actual duration from start to end of 1mm value points. (Excluding ramp values)

CAM TIMING		OPENS(°)		CLOSES(°)		TOTAL DURATION(°)
at 0.05"	IN	ATDC	7.0	ABDC	47.0	220.0
Valve Lift	EX	BBDC	47.0	BTDC	7.0	220.0

Values are of actual duration from start to end of 0.05" value points. (Excluding ramp values)

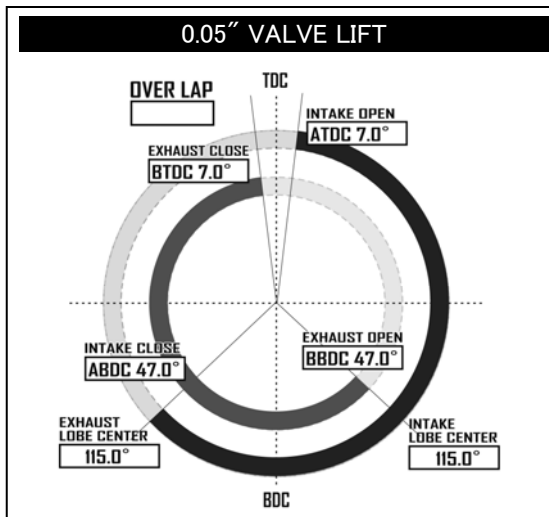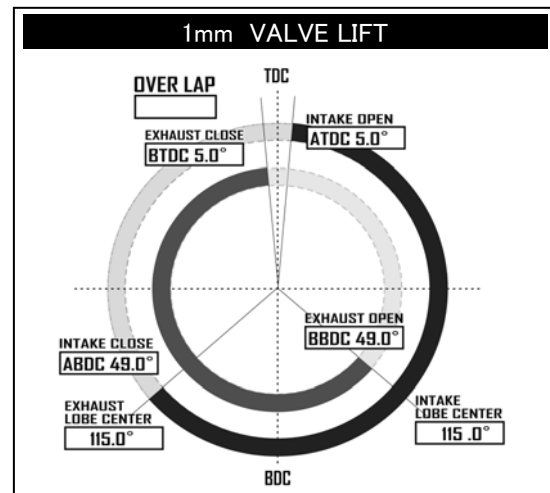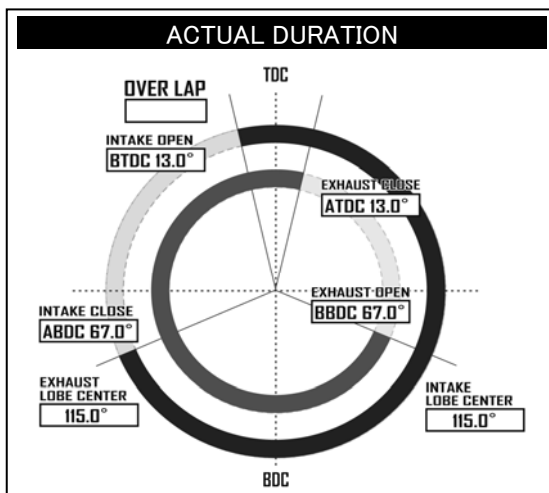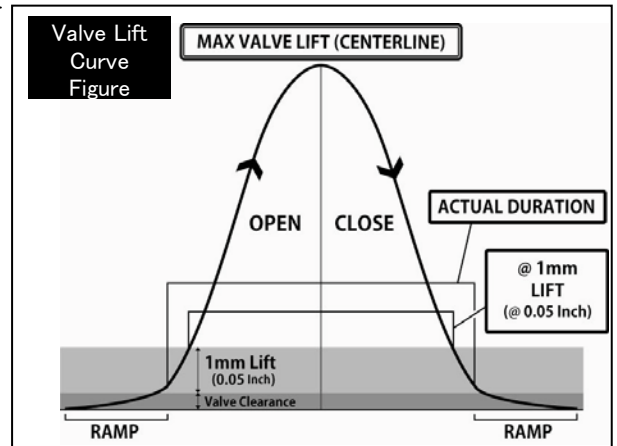

REQUIRED VALVE SPRING SPEC	
NOMAL HEIGHT (mm)	41.0
SET LENGTH (mm)	35.0
LIFT LENGTH (mm)	25.0
COMPRESSED HEIGHT (mm)	24.0
SET LOAD (kgf)	24.2 ± 7%
LIFT LOAD (kgf)	80.6 ± 7%
TOMEI PART NUMBER	13203R800

REQUIRED PARTS	
PRODUCT NAME	TOMEI PART NUMBER
ADJUSTABLE CAM PULLEYS IN	152009
ADJUSTABLE CAM PULLEYS EX	152010