

TOMEI Camshaft Spec Card

PART NAME **PROCAM** ENGINE **RB25DE(T) R33 Early Model**

PART NUMBER SET - IN **1417260102** EX **1418260102**

※ R33 Early / Late model compatible

GRIND	IN	260° / 10.25mm	SOLID	BACE	IN	Φ 29.0	ROCKER ARM RATIO*	VALVE CLEARANCE IN	0.45
	EX	260° / 10.25mm	SOLID	CIRCLE(Φ)	EX	Φ 29.0	-	WHEN COLD EX	0.38

LIFT	IN	@CAM 10.25mm	@VALVE 9.80mm	LOBE	IN	110.0
	EX	@CAM 10.25mm	@VALVE 9.87mm	CENTER(°)	EX	115.0

* ALL LIFTS ARE BASED ON ZERO LASH AND THORETICAL ROCKER ARM RATIOS

CAM TIMING		OPENS(°)		CLOSES(°)		Actual Duration @ Opening(°)
Actual Duration	IN	BTDC	18.0	ABDC	62.0	260.0
Valve Lift	EX	BBDC	63.0	ATDC	17.0	260.0





Values shown are, from start to the end of actual duration. (Excluding the ramp values)

CAM TIMING		OPENS(°)		CLOSES(°)		TOTAL DURATION(°)
at 1mm	IN	BTDC	1.5	ABDC	44.0	225.5
Valve Lift	EX	BBDC	47.5	TDC		227.5

Values are of actual duration from start to end of 1mm value points. (Excluding ramp values)

CAM TIMING		OPENS(°)		CLOSES(°)		TOTAL DURATION(°)
at 0.05"	IN	BTDC	0.5	ABDC	43.0	223.5
Valve Lift	EX	BBDC	46.5	BTDC	1.0	225.5

Values are of actual duration from start to end of 0.05" value points. (Excluding ramp values)

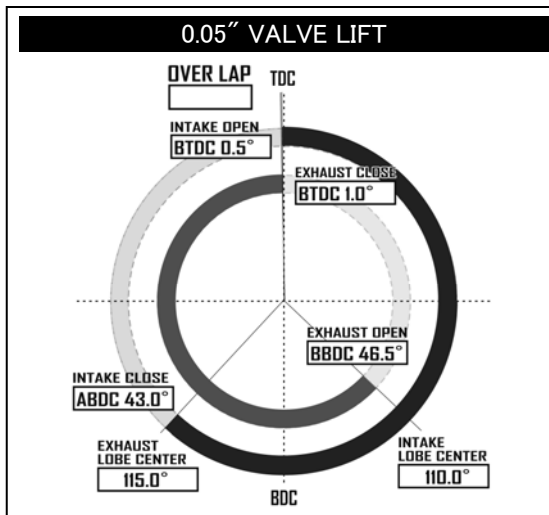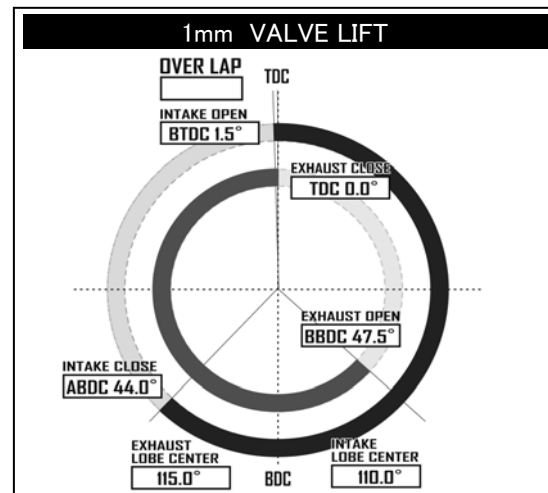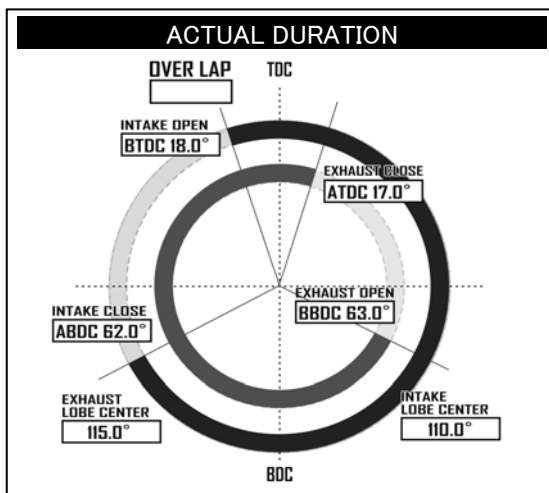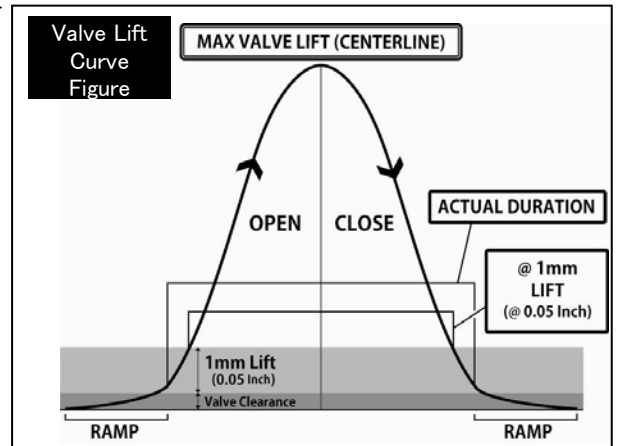

REQUIRED VALVE SPRING SPEC		
NOMAL HEIGHT (mm)	IN	41.0
	EX	44.5
SET LENGTH (mm)		35.0
LIFT LENGTH (mm)		25.0
COMPRESSED HEIGHT (mm)		24.0
SET LOAD (kgf)		24.2 ± 7%
		38.5
LIFT LOAD (kgf)		80.6 ± 7%
		72.0 ± 5%
TOMEI PART NUMBER		163022

REQUIRED PARTS	
PRODUCT NAME	TOMEI PART NUMBER
SOLID VALVE LIFTERS	163006
SHIMS	
ADJUSTABLE CAM PULLEYS IN	152009
ADJUSTABLE CAM PULLEYS EX	152010
VALVE SPRINGS TYPE-B	163022