

TOMEI Camshaft Spec Card

PART NAME **PROCAM** ENGINE **VG30DET(T) for STD Pulley**

PART NUMBER **SET** - **IN** 142005 **EX** 142006

GRIND	IN	270° / 8.80mm	LASH	BACE	IN	Φ32.0	ROCKER ARM RATIO*	VALVE CLEARANCE	IN	-
	EX	270° / 8.80mm	LASH	CIRCLE(Φ)	EX	Φ32.0	-	WHEN COLD	EX	-

LIFT	IN	@CAM 8.80mm	@VALVE 8.80mm	LOBE	IN	115.0
	EX	@CAM 8.80mm	@VALVE 8.80mm	CENTER(°)	EX	115.0

* ALL LIFTS ARE BASED ON ZERO LASH AND THORETICAL ROCKER ARM RATIOS

CAM TIMING		OPENS(°)		CLOSES(°)		Actual Duration @ Opening(°)
Actual Duration	IN	BTDC	19.0	ABDC	71.0	270.0
Valve Lift	EX	BBDC	71.0	ATDC	19.0	270.0





Values shown are, from start to the end of actual duration. (Excluding the ramp values)

CAM TIMING		OPENS(°)		CLOSES(°)		TOTAL DURATION(°)
at 1mm	IN	BTDC	1.0	ABDC	54.0	235.0
Valve Lift	EX	BBDC	51.0	ATDC	4.0	235.0

Values are of actual duration from start to end of 1mm value points. (Excluding ramp values)

CAM TIMING		OPENS(°)		CLOSES(°)		TOTAL DURATION(°)
at 0.05"	IN	ATDC	1.0	ABDC	52.0	231.0
Valve Lift	EX	BBDC	49.0	ATDC	2.0	231.0

Values are of actual duration from start to end of 0.05" value points. (Excluding ramp values)

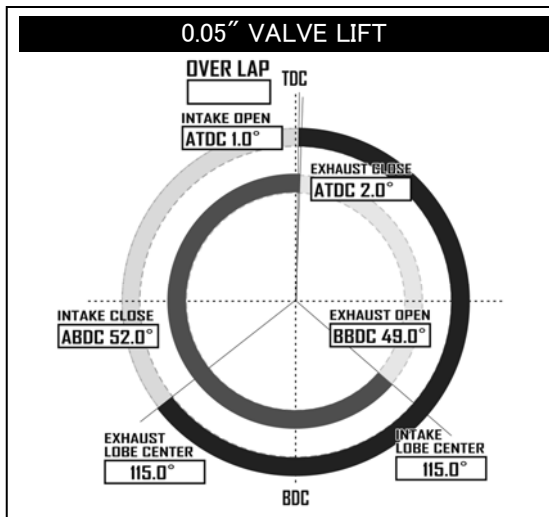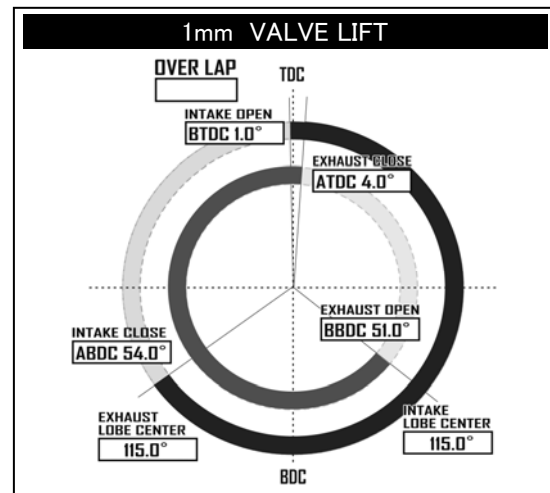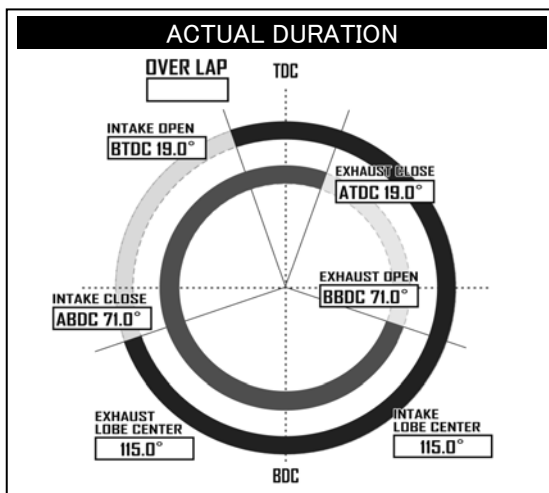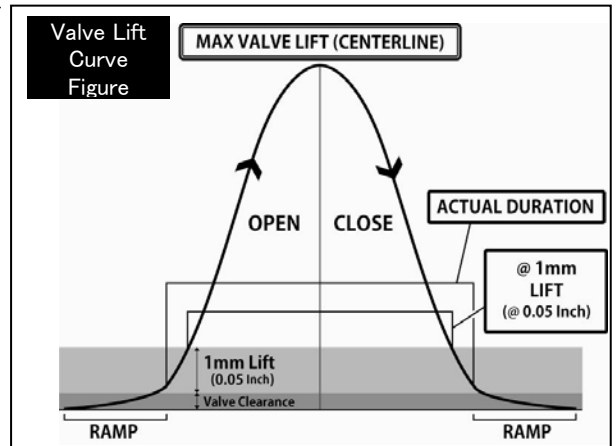

REQUIRED VALVE SPRING SPEC	
NOMAL HEIGHT (mm)	41.0
SET LENGTH (mm)	35.0
LIFT LENGTH (mm)	25.0
COMPRESSED HEIGHT(mm)	24.0
SET LOAD (kgf)	24.2 ± 7%
LIFT LOAD (kgf)	80.6 ± 7%
TOMEI PART NUMBER	13203R800

REQUIRED PARTS	
PRODUCT NAME	TOMEI PART NUMBER